



Job Name:

Truss ID: C11036

Qty: 1 SPACING: 2-0-0 PLY: 1 WEIGHT: 215.01

TC	FORCE	AXL	BND	CSI	ID	SCRWS
OL-1	65	0.01	0.53	0.53	1	
1-2	-58	0.01	0.48	0.49	1	-SP
2-3	-2736	0.35	0.34	0.66	1	SP-SP
3-4	-2187	0.27	0.51	0.75	1	SP-SP
4-5	-3798	0.52	0.51	0.97	1	SP-
5-6	-3752	0.52	0.31	0.79	1	
6-7	-3916	0.55	0.31	0.84	1	
7-8	-4336	0.61	0.20	0.78	1	
8-9	-4350	0.60	0.11	0.71	1	
9-10	-4306	0.60	0.12	0.70	1	
10-11	-4297	0.60	0.12	0.72	1	
11-12	-4049	0.57	0.18	0.72	1	
12-13	-4072	0.57	0.18	0.75	1	
13-14	-3694	0.52	0.26	0.74	1	
14-15	-3768	0.53	0.26	0.78	1	
15-16	-3224	0.45	0.24	0.65	1	
16-17	-3386	0.47	0.24	0.68	1	
17-18	-3406	0.47	0.35	0.78	1	
18-19	-2836	0.40	0.35	0.71	1	OB- 4B
19-20	-2832	0.40	0.36	0.71	1	4B- OB
20-21	-3372	0.47	0.36	0.78	1	
21-22	-3360	0.47	0.25	0.69	1	
22-23	-3190	0.45	0.25	0.66	1	
23-24	-3743	0.52	0.27	0.78	1	
24-25	-3665	0.51	0.27	0.74	1	
25-26	-4052	0.57	0.19	0.75	1	
26-27	-4026	0.56	0.19	0.72	1	
27-28	-4287	0.60	0.12	0.72	1	
28-29	-4295	0.60	0.12	0.71	1	
29-30	-4361	0.61	0.11	0.71	1	
30-31	-4353	0.61	0.19	0.77	1	
31-32	-3981	0.56	0.29	0.83	1	
32-33	-3841	0.54	0.28	0.78	1	
33-34	-3889	0.53	0.48	0.96	1	-SP
34-35	-2378	0.30	0.48	0.75	1	SP-SP
35-36	-2887	0.37	0.36	0.70	1	SP-SP
36-37	-57	0.01	0.48	0.49	1	SP-
37-OR	65	0.01	0.53	0.53	1	

BC	FORCE	AXL	BND	CSI	ID	SCRWS
38-39	0	0.00	0.24	0.24	1	-SP
39-40	2146	0.28	0.32	0.60	1	SP-SP
40-41	2146	0.25	0.40	0.64	1	SP-SP
41-42	3309	0.41	0.40	0.79	1	SP-
42-43	3309	0.42	0.10	0.52	1	
43-44	3710	0.48	0.17	0.64	1	
44-45	4019	0.52	0.19	0.68	1	
45-46	4091	0.52	0.05	0.57	1	
46-47	4109	0.53	0.08	0.58	1	
47-48	4033	0.52	0.06	0.58	1	
48-49	3952	0.51	0.12	0.62	1	
49-50	3815	0.49	0.12	0.61	1	
50-51	3687	0.47	0.12	0.59	1	
51-52	3514	0.45	0.25	0.70	1	
52-53	3333	0.43	0.55	0.93	1	
53-54	3173	0.41	0.53	0.91	1	
54-55	3173	0.41	0.34	0.74	1	
55-56	2982	0.38	0.36	0.74	1	
56-57	3142	0.40	0.36	0.77	1	
57-58	3142	0.40	0.55	0.93	1	
58-59	3307	0.42	0.57	0.95	1	
59-60	3489	0.45	0.26	0.70	1	
60-61	3665	0.47	0.12	0.59	1	
61-62	3796	0.49	0.12	0.61	1	
62-63	3937	0.50	0.13	0.62	1	
63-64	4023	0.52	0.07	0.59	1	
64-65	4106	0.53	0.08	0.59	1	

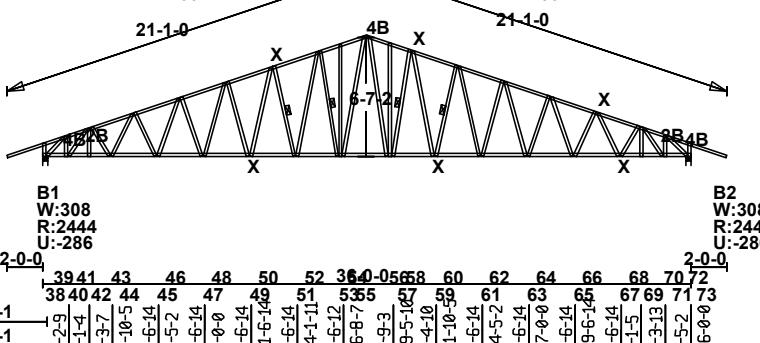

Scale: 3/32" = 1'

WARNING Read all notes on this sheet and verify all design parameters.

Truss design on this sheet is only valid with NUTRUSS sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.

Designer:
Dsgn Chk:
Engg Chk:
Cutting :

TC Live 42.00 psf
TC Dead 10.00 psf
BC Live 0.00 psf
BC Dead 10.00 psf

TOTAL 62.00 psf

WO: C11036_Trusses

Design Spec: AISI S100-2012
Buildg Spec: IBC-2018

Date: 11/24/2022@
Seqn S8.1.0a - 6333

NUTRUSS™
A NUCONSTEEL Product

13:36:28