


BRG	X-LOC	REACT	SIZE
1	0- 1-12	446	3.50"
2	1- 2-13	192	3.50"
3	2- 5-10	278	3.50"
4	4- 1- 1	201	3.50"
5	5- 8- 9	216	3.50"
6	7- 4- 1	379	3.50"
7	7- 6- 0	303	3.50"
8	9- 1- 4	203	3.50"
9	10- 8- 7	216	3.50"
10	12- 3-11	421	3.50"
11	12- 6- 0	541	3.50"
12	14- 0- 7	192	3.50"
13	15- 6-15	217	3.50"
14	17- 1- 6	336	3.50"
15	17- 3-10	249	3.50"
16	17- 6- 0	259	3.50"
17	19- 0- 7	192	3.50"
18	20- 6-14	217	3.50"
19	22- 1- 6	336	3.50"
20	22- 3-10	250	3.50"
21	22- 6- 0	260	3.50"
22	24- 1- 4	203	3.50"
23	25- 8- 7	216	3.50"
24	27- 3-11	559	3.50"
25	27- 6- 0	419	3.50"
26	29- 1- 5	204	3.50"
27	30- 8-11	215	3.50"
28	32- 4- 0	362	3.50"
29	32- 6- 0	340	3.50"
30	34- -1-14	210	3.50"
31	35- 9-12	211	3.50"
32	37- 5-10	315	3.50"
33	38- 8-13	197	3.50"
34	39-10- 4	436	3.50"

TC	FORCE	AXL	BND	CSI	ID	SCRWS
OL-1	65	0.01	0.67	0.67	1	
1-2	-73	0.01	0.61	0.62	1	
2-3	134	0.02	0.57	0.57	1	
3-4	-226	0.04	0.61	0.65	1	
4-5	151	0.00	0.61	0.61	1	
5-6	50	0.01	0.66	0.66	1	
6-7	346	0.03	0.66	0.66	1	
7-8	-62	0.01	0.56	0.57	1	
8-9	67	0.01	0.61	0.61	1	
9-10	80	0.01	0.20	0.20	1	
10-11	-75	0.01	0.03	0.04	1	
11-12	61	0.01	0.02	0.03	1	
12-13	-85	0.00	0.17	0.17	1	
13-14	-96	0.01	0.51	0.52	1	
14-15	-107	0.02	0.58	0.59	1	
15-16	311	0.02	0.66	0.66	1	
16-17	-54	0.00	0.66	0.66	1	
17-18	137	0.01	0.64	0.65	1	
18-19	-237	0.05	0.64	0.68	1	
19-20	169	0.03	0.60	0.61	1	
20-21	-70	0.01	0.61	0.62	1	
21-OR	65	0.01	0.67	0.67	1	

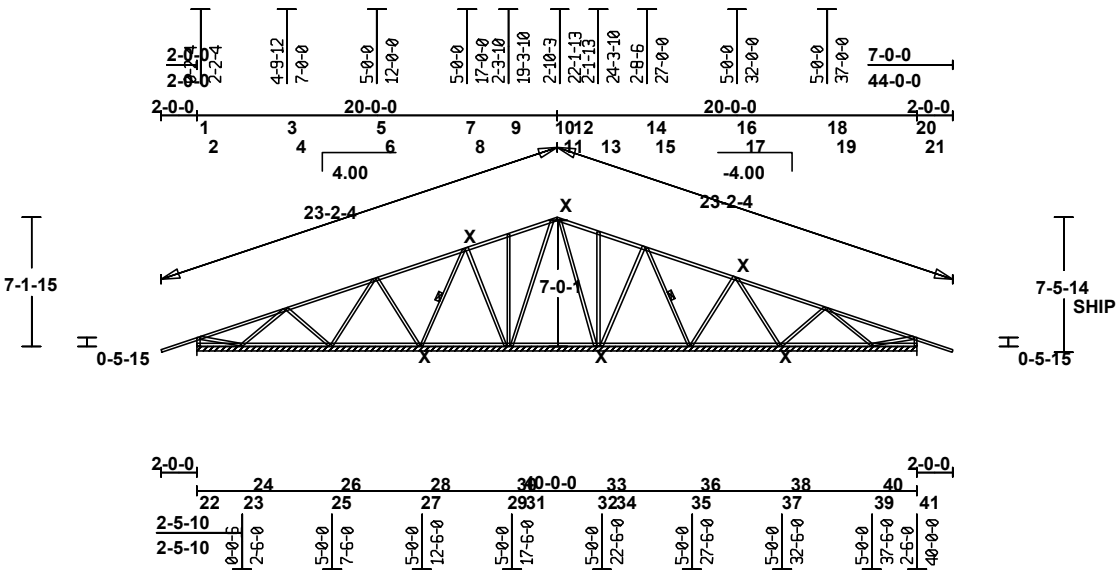

OVER CONTINUOUS SUPPORT

Scale: 3/32" = 1'

NUTRUSSTM
A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters.
Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.

Designer:	
Dsgn Chk:	
Engg Chk:	
Cutting :	
TC Live	42.00 psf
TC Dead	10.00 psf
BC Live	0.00 psf
BC Dead	10.00 psf
TOTAL	62.00 psf

WO: C11140_Trusses
Design Spec: AISI S100-2012
Buildg Spec: IBC-2018
Date: 11/23/2022@
Seqn S8.1.0a - 6297

MEM	FORCE	END	CSI ID	SCRS	
22-23	0	0.00	0.09	0.09	1
23-24	-258	0.05	0.01	0.11	1
24-25	0	0.00	0.12	0.12	1
25-26	0	0.00	0.12	0.13	1
26-27	0	0.00	0.12	0.12	1
27-28	0	0.00	0.12	0.12	1
28-29	0	0.00	0.11	0.11	1
29-30	0	0.00	0.11	0.11	1
30-31	0	0.00	0.09	0.09	1
31-32	0	0.00	0.11	0.11	1
32-33	0	0.00	0.11	0.11	1
33-34	0	0.00	0.10	0.10	1
34-35	0	0.00	0.12	0.12	1
35-36	0	0.00	0.12	0.12	1
36-37	0	0.00	0.12	0.12	1
37-38	0	0.00	0.12	0.12	1
38-39	0	0.00	0.11	0.11	1
39-40	-110	0.01	0.08	0.09	1
40-41	15	0.00	0.09	0.09	1

UPLIFT REACTION(S) :

Support	C&C Wind	Main Wind	Non-Wind
1	-100 lb	-117 lb	
3	-24 lb	-16 lb	
6	-67 lb	-80 lb	-97 lb
7	-6 lb	-35 lb	-148 lb
10	-77 lb	-83 lb	-49 lb
11	-57 lb	-54 lb	-80 lb
14	-15 lb	-22 lb	
15	-85 lb	-53 lb	-124 lb
16	-42 lb	-11 lb	
20	-90 lb	-54 lb	-124 lb
21	-15 lb	-22 lb	-7 lb
24	-61 lb	-56 lb	-51 lb
25	-72 lb	-81 lb	-96 lb
28	-12 lb	-40 lb	-126 lb
29	-66 lb	-79 lb	-127 lb
32	-31 lb	-20 lb	
34	-97 lb	-114 lb	

THIS DESIGN IS THE COMPOSITE RESULT OF MULTIPLE LOAD CASES. Loaded for 10 PSF non-concurrent BCLL. Loaded for 200 lb non-concurrent moving BCLL. Mark all interior bearing locations. Install interior support(s) before erection. This truss is designed using the ASCE7-16 Wind Specification. Bldg Enclosed = Yes, Truss Location = End Zone, Exp Category = B, Bldg Length = 60.00 ft, Bldg Width = 25.00 ft, Mean roof height = 13.58 ft, mph = 110, Occupancy Category II, Wind Dead Load = 7.20 psf. Designed as Main Wind Force Resisting System - Low-rise and Components and Cladding. Tributary Area = 80 sqft. Uplifts based on elevation at or above 0 ft. 20 psf bottom chord live load NOT required on this truss, per IBC/IRC requirements for attics with limited storage.

This design based on chord bracing applied per the following schedule:

	max o.c.	from	to
TC	12.00"	-2- 0- 0	42- 0- 0
BC	12.00"	0- 0- 0	40- 0- 0

Galvanization: G60

REACTIONS

Brg	Reac	Horiz	Brg	Reac	Horiz
1	446	0	18	217	0
2	192	0	19	336	-34
3	278	242	20	250	0
4	201	-9	21	260	27
5	216	0	22	203	0
6	379	-315	23	216	0
7	303	120	24	559	-235
8	203	0	25	419	249
9	216	0	26	204	0
10	421	-254	27	215	0
11	541	230	28	362	-132
12	192	0	29	340	309
13	217	0	30	210	0
14	336	-25	31	211	0
15	249	0	32	315	-257
16	259	72	33	197	15
17	192	0	34	436	0

MEM	FORCE	END	CSI ID	SCRS
1-22	-436	0.08	1	
2-23	71	0.02	1	
3-24	-384	0.31	1	
4-25	-414	0.33	1	
5-26	-222	0.32	1	
6-27	-475	0.69	1	
7-28	-573	0.47	1	
8-29	-68	0.15	1	
9-30	-272	0.68	1	
10-31	-234	0.75	1	
12-32	-125	0.39	1	
13-33	-273	0.70	1	
14-34	-69	0.16	1	
15-35	-591	0.50	1	
16-36	-472	0.70	1	
17-37	-246	0.36	1	
18-38	-408	0.33	1	
19-39	-434	0.36	1	
20-40	-84	0.04	1	
21-41	-426	0.08	1	

Type	ID	SECTION	Fy (ksi)	Joints
TC	1	20TC20	50	
BC	1	20TC20	50	
WEB	1	20TC20	50	

	DEFLECTION	LOC.	ALLOW.	LC
Vert TL:	-0.14" (L/999)	15-16	L/240	40
Vert LL:	-0.12" (L/999)	15-16	L/360	40
Horz TL:	0.00"			

Cantilever

Vert TL:	-0.08" (L/296)	OL-1	L/ 90	1
Vert LL:	-0.06" (L/367)	OL-1	L/120	1

==== Joint Locations =====

1	0- 0- 0	22	0- 0- 0
2	0- 2- 4	23	2- 5-10
3	4-10- 6	24	2- 6- 0
4	5- 0- 0	25	7- 4- 1
5	9- 9-12	26	7- 6- 0
6	10- 0- 0	27	12- 3-11
7	14- 9-10	28	12- 6- 0
8	15- 0- 0	29	17- 1- 6
9	17- 3-10	30	17- 3-10
10	19- 8-12	31	17- 6- 0
11	20- 0- 0	32	22- 1- 6
12	20- 1-13	33	22- 3-10
13	22- 3-10	34	22- 6- 0
14	24- 9-10	35	27- 3-11
15	25- 0- 0	36	27- 6- 0
16	29- 9-12	37	32- 4- 0
17	30- 0- 0	38	32- 6- 0
18	34-10- 7	39	37- 5-10
19	35- 0- 0	40	37- 6- 0
20	39- 9-12	41	40- 0- 0
21	40- 0- 0		

== X-Brac. Locations (Joints) ==

BC	TC
27	7
32	12
37	17

Each connection requires 3/8" diameter proprietary bolt supplied by NUCONSTEEL. SCRS = The required number of double-sided #14 screws at each end of the truss member: SP = Spacer supplied by NUCONSTEEL

NUTRUSSTM
A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters. Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.

When the specified screw count cannot be achieved at the chord to web connections, a 16 gauge gusset plate must be added on both sides of the connection. Typically, gusset plates are at pitch break joints.
Min. screw spacing = 9/16" and min. edge distance = 9/16".

Chk:	Dsgnr:	WO: C11140_Trusses
TC Live	42.00 psf	Design Spec: AISI-2001
TC Dead	10.00 psf	Buildg Spec: IBC-2018
BC Live	0.00 psf	Date: 11/23/2022@
BC Dead	10.00 psf	Seqn S8.1.0a - 6297
TOTAL	62.00 psf	17:57:06