



BRG	X-LOC	REACT	SIZE
1	0- 1-12	463	3.50"
2	1- 1-10	171	3.50"
3	2- 3- 4	232	3.50"
4	3- 9- 7	205	3.50"
5	5- 3- 9	207	3.50"
6	6- 9-12	356	3.50"
7	7- 0- 0	433	3.50"
8	8- 5- 2	212	3.50"
9	9-10- 4	197	3.50"
10	11- 3- 6	275	3.50"
11	11- 5-10	265	3.50"
12	11- 8- 0	289	3.50"
13	13- 1-14	201	3.50"
14	14- 7-12	213	3.50"
15	16- 1-10	321	3.50"
16	16- 4- 0	254	3.50"
17	16- 6- 4	214	3.50"
18	17-11- 7	175	3.50"
19	19- 4-10	208	3.50"
20	20- 9-12	458	3.50"
21	21- 0- 0	385	3.50"
22	22- 6- 7	216	3.50"
23	24- 0-14	192	3.50"
24	25- 7- 4	246	3.50"
25	26- 9-10	185	3.50"
26	27-10- 4	441	3.50"

TC	FORCE	AXL	BND	CSI	ID	SCRWS
OL-1	91	0.02	0.68	0.68	1	
1-2	-112	0.02	0.60	0.62	1	
2-3	-119	0.01	0.48	0.48	1	
3-4	-58	0.01	0.56	0.57	1	
4-5	301	0.01	0.56	0.56	1	
5-6	-61	0.01	0.42	0.43	1	
6-7	79	0.01	0.50	0.51	1	
7-8	92	0.01	0.19	0.20	1	
8-9	78	0.01	0.02	0.03	1	
9-10	68	0.01	0.03	0.04	1	
10-11	89	0.00	0.19	0.19	1	
11-12	-81	0.02	0.51	0.53	1	
12-13	-82	0.02	0.44	0.45	1	
13-14	292	0.00	0.58	0.58	1	
14-15	-65	0.01	0.58	0.60	1	
15-16	143	0.02	0.51	0.52	1	
16-17	-101	0.02	0.60	0.62	1	
17-OR	91	0.02	0.68	0.68	1	

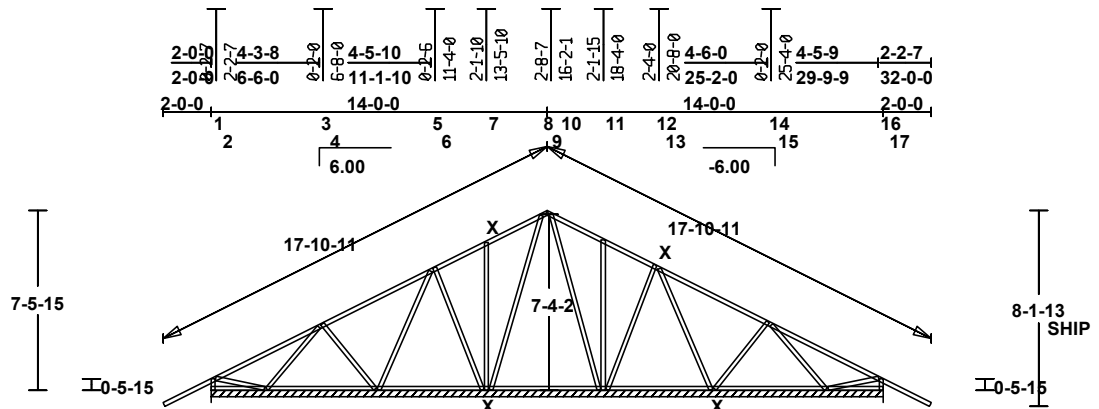

BC	FORCE	AXL	BND	CSI	ID	SCRWS
18-19	0	0.00	0.08	0.08	1	
19-20	-155	0.03	0.06	0.09	1	
20-21	0	0.00	0.10	0.10	1	
21-22	0	0.00	0.10	0.10	1	
22-23	0	0.00	0.10	0.10	1	
23-24	0	0.00	0.09	0.10	1	
24-25	0	0.00	0.10	0.10	1	
25-26	0	0.00	0.11	0.11	1	
26-27	0	0.00	0.11	0.11	1	
27-28	0	0.00	0.08	0.08	1	
28-29	0	0.00	0.08	0.09	1	
29-30	0	0.00	0.11	0.11	1	
30-31	0	0.00	0.11	0.11	1	
31-32	-93	0.02	0.06	0.08	1	
32-33	10	0.00	0.09	0.09	1	



WEB	FORCE	CSI	ID	SCRWS
1-18	-454	0.08	1	

OVER CONTINUOUS SUPPORT

Scale: 1/8" = 1'

NUTRUSSTM
A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters.
Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.

Designer:	
Dsgn Chk:	
Engg Chk:	
Cutting :	
TC Live	42.00 psf
TC Dead	10.00 psf
BC Live	0.00 psf
BC Dead	10.00 psf
TOTAL	62.00 psf

WO: C61228E_Trusses
Design Spec: AISI S100-2012
Buildg Spec: IBC-2018
Date: 11/24/2022@
Seqn S8.1.0a - 6316

UPLIFT REACTION(S) :

Support	C&C Wind	Main Wind	Non-Wind
1	-134 lb	-134 lb	
6	-118 lb	-111 lb	-70 lb
7	-64 lb	-45 lb	-27 lb
10	-38 lb	-40 lb	
11	-98 lb	-58 lb	-102 lb
12	-21 lb		
16	-98 lb	-56 lb	-115 lb
17	-36 lb	-38 lb	-12 lb
20	-68 lb	-49 lb	-76 lb
21	-115 lb	-109 lb	-27 lb
24		-1 lb	
26	-126 lb	-127 lb	

Type ID SECTION Fy(ksi) Joints

TC	1	20TC20	50	
BC	1	20TC20	50	
WEB	1	20TC20	50	

20 psf bottom chord live load NOT required on this truss, per IBC/IRC requirements for attics with limited storage.

THIS DESIGN IS THE COMPOSITE RESULT OF MULTIPLE LOAD CASES.
 Loaded for 10 PSF non-concurrent BCLL.
 Loaded for 200 lb non-concurrent moving BCLL.
 Mark all interior bearing locations.
 Install interior support(s) before erection.
 This truss is designed using the ASCE7-16 Wind Specification
 Bldg Enclosed = Yes,
 Truss Location = End Zone
 Exp Category = B
 Bldg Length = 60.00 ft, Bldg Width = 25.00 ft
 Mean roof height = 13.75 ft, mph = 110
 Occupancy Category II, Wind Dead Load = 7.20 psf
 Designed as Main Wind Force Resisting System
 - Low-rise and Components and Cladding
 Tributary Area = 56 sqft
 Uplifts based on elevation at or above 0 ft

This design based on chord bracing applied per the following schedule:

	max o.c.	from	to
TC	12.00"	-2- 0- 0	30- 0- 0
BC	12.00"	0- 0- 0	28- 0- 0

Galvanization: G60

REACTIONS

Brg	Reac	Horiz	Brg	Reac	Horiz
1	463	0	14	213	0
2	171	0	15	321	-39
3	232	121	16	254	0
4	205	-6	17	214	45
5	207	0	18	175	0
6	356	-244	19	208	0
7	433	184	20	458	-191
8	212	0	21	385	230
9	197	0	22	216	0
10	275	-49	23	192	0
11	265	0	24	246	-117
12	289	58	25	185	10
13	201	0	26	441	0

	DEFLECTION	LOC.	ALLOW.	LC
Vert TL:	-0.10" (L/999)	13-14	L/240	40
Vert LL:	-0.08" (L/999)	13-14	L/360	40
Horz TL:	0.01"			

Cantilever

Vert TL:	-0.12" (L/204)	OL-1	L/ 90	1
Vert LL:	-0.09" (L/253)	OL-1	L/120	1

==== Joint Locations =====

1	0- 0- 0	18	0- 0- 0
2	0- 2- 7	19	2- 3- 4
3	4- 6- 0	20	2- 4- 0
4	4- 8- 0	21	6- 9-12
5	9- 1-10	22	7- 0- 0
6	9- 4- 0	23	11- 3- 6
7	11- 5-10	24	11- 5-10
8	13- 9- 1	25	11- 8- 0
9	14- 0- 0	26	16- 1-10
10	14- 2- 1	27	16- 4- 0
11	16- 4- 0	28	16- 6- 4
12	18- 5-10	29	20- 9-12
13	18- 8- 0	30	21- 0- 0
14	23- 2- 0	31	25- 7- 4
15	23- 4- 0	32	25- 8- 0
16	27- 9- 9	33	28- 0- 0
17	28- 0- 0		

== X-Brac. Locations (Joints) ==

BC	TC
23	7
29	13

Each connection requires 3/8" diameter proprietary bolt supplied by NUCONSTEEL
 SCRWs = The required number of double-sided #14 screws at each end of the truss member: SP = Spacer supplied by NUCONSTEEL

NUTRUSSTM
 A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters.
 Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.
 When the specified screw count cannot be achieved at the chord to web connections, a 16 gauge gusset plate must be added on both sides of the connection. Typically, gusset plates are at pitch break joints.
 Min. screw spacing = 9/16" and min. edge distance = 9/16".

Chk:		WO: C61228E_Trusses
Dsgnr:		
TC Live	42.00 psf	Design Spec: AISI-2001
TC Dead	10.00 psf	Buildg Spec: IBC-2018
BC Live	0.00 psf	
BC Dead	10.00 psf	
TOTAL	62.00 psf	Date: 11/24/2022@ 11:58:04 Seqn S8.1.0a - 6316