



BRG	X-LOC	REACT	SIZE
1	0- 1-12	457	3.50"
2	1- 1-12	174	3.50"
3	2- 3- 8	240	3.50"
4	3- 9-11	203	3.50"
5	5- 3-14	208	3.50"
6	6-10- 0	367	3.50"
7	7- 0- 0	347	3.50"
8	8- 5-14	215	3.50"
9	9-11-13	187	3.50"
10	11- 5-11	455	3.50"
11	11- 8- 0	620	3.50"
12	13- 1-14	202	3.50"
13	14- 7-13	213	3.50"
14	16- 1-11	343	3.50"
15	16- 4- 0	415	3.50"
16	17-10- 0	194	3.50"
17	19- 4- 1	209	3.50"
18	20-10- 1	342	3.50"
19	21- 0- 0	404	3.50"
20	22- 6- 8	216	3.50"
21	24- 1- 0	194	3.50"
22	25- 7- 9	247	3.50"
23	26- 9-12	182	3.50"
24	27-10- 4	459	3.50"

TC	FORCE	AXL	BND	CSI ID	SCRWS
OL-1	65	0.01	0.67	0.67	1
1-2	-77	0.02	0.61	0.62	1
2-3	-124	0.01	0.47	0.49	1
3-4	-148	0.03	0.52	0.54	1
4-5	286	0.05	0.65	0.67	1
5-6	173	0.03	0.76	0.76	1
6-7	469	0.05	0.76	0.78	1
7-8	106	0.01	0.22	0.22	1
8-9	180	0.03	0.08	0.10	1
9-10	310	0.02	0.77	0.77	1
10-11	65	0.01	0.77	0.77	1
11-12	277	0.05	0.70	0.72	1
12-13	-185	0.04	0.57	0.61	1
13-14	-142	0.01	0.52	0.52	1
14-15	-77	0.02	0.61	0.62	1
15-OR	65	0.01	0.67	0.67	1

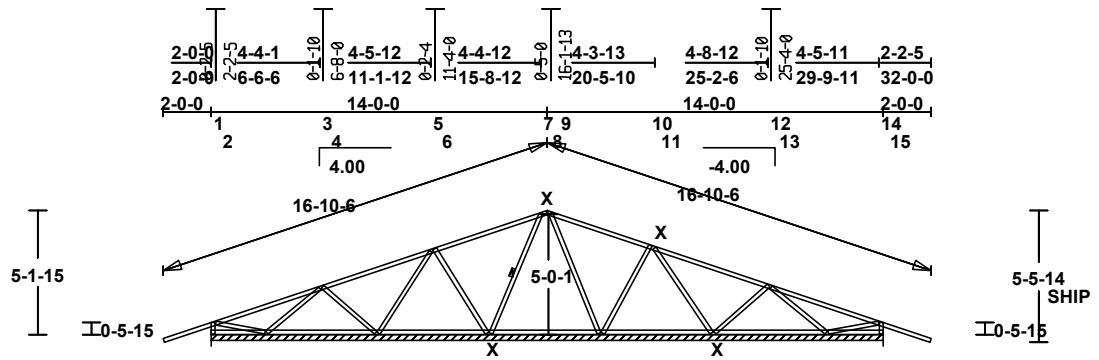

BC	FORCE	AXL	BND	CSI ID	SCRWS
16-17	0	0.00	0.08	0.08	1
17-18	-169	0.03	0.06	0.09	1
18-19	6	0.00	0.10	0.10	1
19-20	0	0.00	0.10	0.11	1
20-21	0	0.00	0.10	0.10	1
21-22	0	0.00	0.10	0.10	1
22-23	0	0.00	0.11	0.11	1
23-24	0	0.00	0.11	0.11	1
24-25	0	0.00	0.09	0.09	1
25-26	0	0.00	0.11	0.11	1
26-27	0	0.00	0.11	0.11	1
27-28	-90	0.02	0.06	0.08	1
28-29	10	0.00	0.08	0.08	1



WEB	FORCE	CSI ID	SCRWS
1-16	-448	0.08	1
2-17	70	0.01	1
3-18	-243	0.17	1
4-19	-435	0.30	1
5-20	-155	0.20	1
6-21	-517	0.67	1
7-22	-655	0.47	1

OVER CONTINUOUS SUPPORT

Scale: 1/8" = 1'

NUTRUSSTM
A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters.
Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.

Designer:		WO: C11128_Trusses
Dsgn Chk:		
Engg Chk:		
Cutting :		
TC Live	42.00 psf	Design Spec: AISI S100-2012
TC Dead	10.00 psf	Buildg Spec: IBC-2018
BC Live	0.00 psf	
BC Dead	10.00 psf	
TOTAL	62.00 psf	Date: 11/23/2022@ 17:31:35
		Seqn S8.1.0a - 6289

UPLIFT REACTION(S) :

Support	C&C Wind	Main Wind	Non-Wind
1	-104 lb	-124 lb	
3	-17 lb	-13 lb	
6	-67 lb	-76 lb	-102 lb
7		-19 lb	-102 lb
10	-131 lb	-89 lb	-55 lb
11	-167 lb	-86 lb	-20 lb
14	-75 lb	-28 lb	-113 lb
15	-128 lb	-81 lb	-74 lb
18	-6 lb	-37 lb	-139 lb
19	-67 lb	-79 lb	-59 lb
22	-27 lb	-15 lb	
24	-105 lb	-123 lb	

Type	ID	SECTION	Fy(ksi)	Joints
TC	1	20TC20	50	
BC	1	20TC20	50	
WEB	1	20TC20	50	

20 psf bottom chord live load NOT required on this truss, per IBC/IRC requirements for attics with limited storage.

THIS DESIGN IS THE COMPOSITE RESULT OF MULTIPLE LOAD CASES.
 Loaded for 10 PSF non-concurrent BCLL.
 Loaded for 200 lb non-concurrent moving BCLL.
 Mark all interior bearing locations.
 Install interior support(s) before erection.
 This truss is designed using the ASCE7-16 Wind Specification
 Bldg Enclosed = Yes,
 Truss Location = End Zone
 Exp Category = B
 Bldg Length = 60.00 ft, Bldg Width = 25.00 ft
 Mean roof height = 12.58 ft, mph = 110
 Occupancy Category II, Wind Dead Load = 7.20 psf
 Designed as Main Wind Force Resisting System
 - Low-rise and Components and Cladding
 Tributary Area = 56 sqft
 Uplifts based on elevation at or above 0 ft

This design based on chord bracing applied per the following schedule:

	max o.c.	from	to
TC	12.00"	-2- 0- 0	30- 0- 0
BC	12.00"	0- 0- 0	28- 0- 0

Galvanization: G60

REACTIONS

Brg	Reac	Horiz	Brg	Reac	Horiz
1	457	0	13	213	0
2	174	0	14	343	-132
3	240	178	15	415	218
4	203	6	16	194	0
5	208	0	17	209	0
6	367	-329	18	342	-156
7	347	83	19	404	348
8	215	0	20	216	0
9	187	0	21	194	0
10	455	-273	22	247	-215
11	620	254	23	182	10
12	202	0	24	459	0

DEFLECTION

LOC.	ALLOW.	LC
Vert TL: -0.11" (L/999)	6-7	L/240 41
Vert LL: -0.09" (L/999)	6-7	L/360 41
Horz TL: 0.01"		

Cantilever

Vert TL: -0.11" (L/221)	OL-1	L/ 90 1
Vert LL: -0.09" (L/274)	OL-1	L/120 1

==== Joint Locations ====

1	0- 0- 0	16	0- 0- 0
2	0- 2- 5	17	2- 3- 8
3	4- 6- 6	18	2- 4- 0
4	4- 8- 0	19	6-10- 0
5	9- 1-12	20	7- 0- 0
6	9- 4- 0	21	11- 5-11
7	13- 8-12	22	11- 8- 0
8	14- 0- 0	23	16- 1-11
9	14- 1-13	24	16- 4- 0
10	18- 3- 6	25	20-10- 1
11	18- 5-10	26	21- 0- 0
12	23- 2- 6	27	25- 7- 9
13	23- 4- 0	28	25- 8- 0
14	27- 9-11	29	28- 0- 0
15	28- 0- 0		

== X-Brac. Locations (Joints) ==

BC	TC
21	7
25	11

Each connection requires 3/8" diameter proprietary bolt supplied by NUCONSTEEL
 SCRWS = The required number of double-sided #14 screws at each end of the truss member: SP = Spacer supplied by NUCONSTEEL

NUTRUSSTM
 A NUCONSTEEL Product

WARNING Read all notes on this sheet and verify all design parameters.
 Truss design on this sheet is only valid with NUTRUSST sections and is for an individual building component, not a truss system. Bracing shown on this drawing is not erection bracing, wind bracing, portal bracing or similar bracing which is part of the building design and which must be considered by the building designer. Bracing shown is lateral bracing of truss members only. Any additional bracing, temporary and/or permanent, is the responsibility of the truss erector and/or the building designer. The Professional Engineer's seal indicates only that the truss assembly shown on this sheet meets the acceptable design criteria for the loads, loading condition, truss configuration and spans specified.
 When the specified screw count cannot be achieved at the chord to web connections, a 16 gauge gusset plate must be added on both sides of the connection. Typically, gusset plates are at pitch break joints."
 Min. screw spacing = 9/16" and min. edge distance = 9/16".

Chk:		WO: C11128_Trusses
Dsgnr:		
TC Live	42.00 psf	Design Spec: AISI-2001
TC Dead	10.00 psf	Buildg Spec: IBC-2018
BC Live	0.00 psf	
BC Dead	10.00 psf	
TOTAL	62.00 psf	Date: 11/23/2022@ 17:31:35
		Seqn S8.1.0a - 6289